



**PIN ASSIGNMENT**

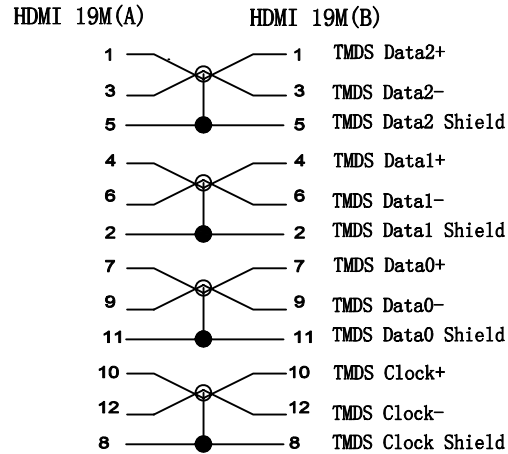

**PIN ASSIGNMENT**

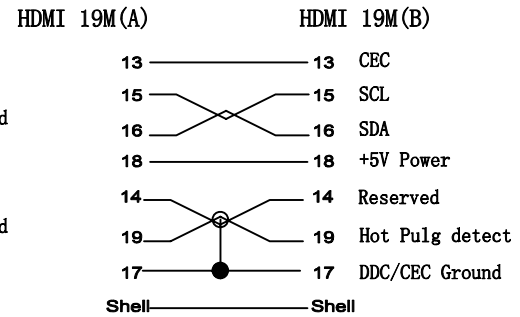

ROHS Compliant

						<a href="http://www.USBFireWire.com">www.USBFireWire.com</a>														
3	65P Black PVC			<table border="1" style="font-size: small;"> <tr> <td colspan="2">Tolerance, Unless Otherwise Specified</td> </tr> <tr> <td>UP TO 5</td> <td>±0.2</td> </tr> <tr> <td>ABOVE 5 --30</td> <td>±0.3</td> </tr> <tr> <td>ABOVE 30--50</td> <td>±0.4</td> </tr> <tr> <td>ABOVE 50</td> <td>±0.5</td> </tr> </table>	Tolerance, Unless Otherwise Specified		UP TO 5	±0.2	ABOVE 5 --30	±0.3	ABOVE 30--50	±0.4	ABOVE 50	±0.5	DRAW:		TITLE	HDMI AM TO AM		
Tolerance, Unless Otherwise Specified																				
UP TO 5	±0.2																			
ABOVE 5 --30	±0.3																			
ABOVE 30--50	±0.4																			
ABOVE 50	±0.5																			
2	HDMI AM,BLACK INSULATION,SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HAM3)			CHECKED:		PART NO.	RR-3D-3S-XXG													
1	(1P*30AWG+D+AL)*5C+4C*30AWG+AL+D+B OD7.3 L=12in/24in/6ft/20ft Black			APPROVED:		DRAW NO.														
NO	Descriptron	Q' TY	Unit	ANGLE	DATE	2012-09-18	SCALE	1:1	UNIT	mm										