

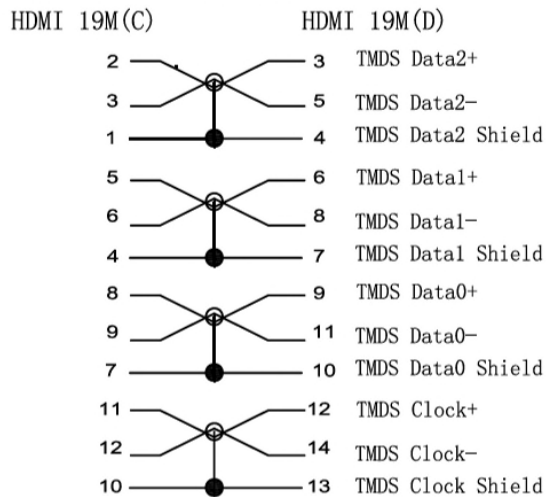


PIN ASSIGNMENT

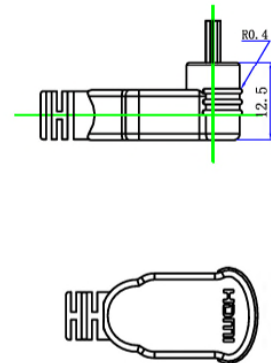

PIN ASSIGNMENT

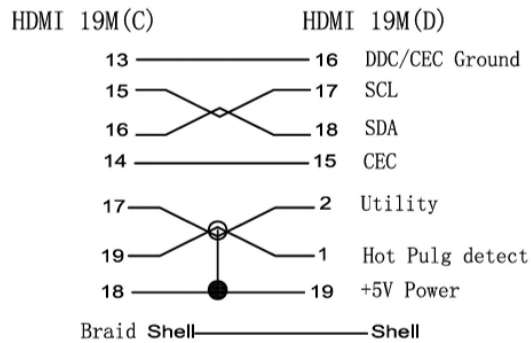

ROHS Compliant

				www.USBFireWire.com							
4	65P Black PVC			Tolerance, Unless Otherwise Specified	DRAW:		TITLE	HDMI DM TO CM			
3	HDMI AF, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HCM3)				UP TO 5	±0.2	CHECKED:	PART NO.	RR-7S-5D-XXG		
2	HDMI DM, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HDM3)				ABOVE 5 —30	±0.3	APPROVED:	DRAW NO.			
1	(1P*30AWG+D+AL)*5C+4C*30AWG+AL+D+B OD5.5 L=5in/12in/24in/6ft Black				ABOVE 30—50	±0.4	DATE	SCALE	1:1	UNIT	mm
NO	Descriptron	Q' TY	Unit	ANGLE	±3°						